

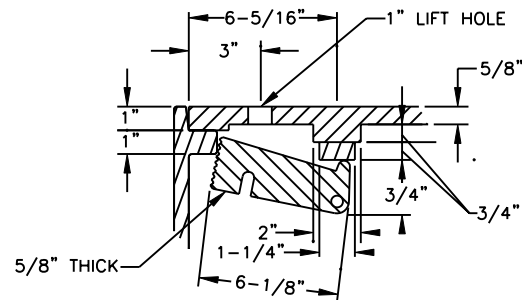



BLIND PICK NOTCH DETAIL




BOLT ON CAM TYPE
LOCKING DEVICE - SECTION C

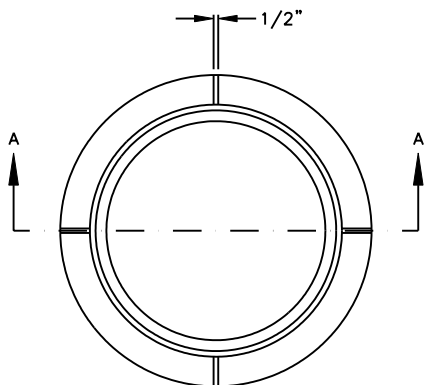

BOLT ON CAM TYPE
LOCKING DEVICE - SECTION D



COVER SKID DESIGN DETAIL


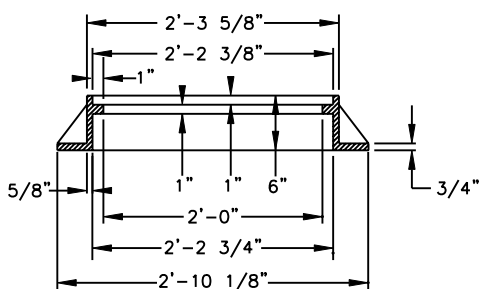


NOTES:
GASKET AND GROVE MAY BE IN THE SECT OR UNDERSIDE
OF COVER.



WASHER SHALL BE LEAD OR NEOPRENE.

UNLESS OTHERWISE SHOWN ON THE PLANS, OR SPECIFIED IN
THE SPECIAL PROVISIONS, TYPE 1, STANDARD MANHOLE RINGS
AND COVERS SHALL BE USED.

IN LIEU OF BLIND PICK NOTCH FOR STORM SEWER MANHOLE
COVERS, DRILL THREE 1 INCH DIAMETER HOLES AT 120°
SPACING.

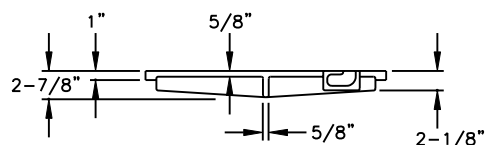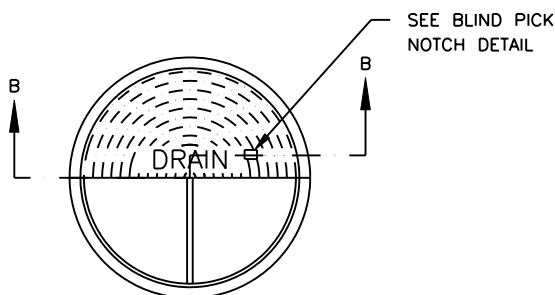

SECTION B-B
TYPE 1 STANDARD

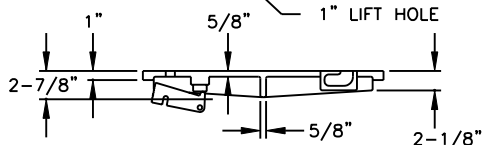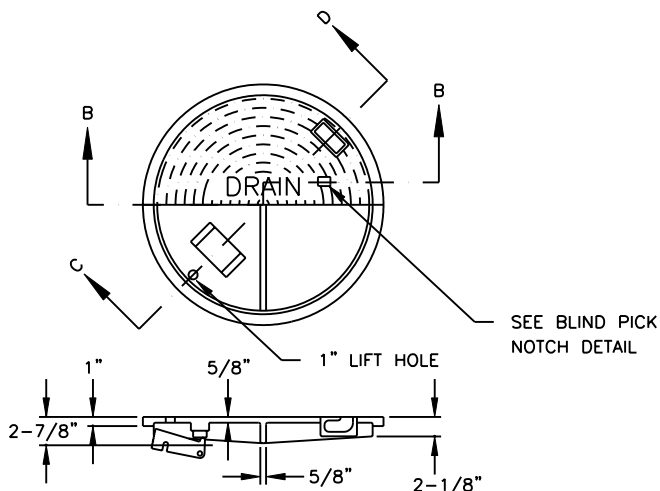

SECTION B-B
TYPE 3 CAM LOCK

MANHOLE RING AND COVER

NO SCALE

APPROVED: JON C. SPANGLER

REV. DATE: OCTOBER 3, 1995

STORMWATER DIVISION



STANDARD DETAILS

MANHOLE RING AND COVER

FILE SD616.DWG DRAWING NO. 616